

## Optimized design allows for interior chambers without support structures.

### Real Challenge

Recently, a Stratasys customer inquired about using Fortus 3D Production System to manufacture a medical device out of PPSF (polyphenylsulfone) with a hollow interior chamber as one single part. The customer's existing profusion tray design was created for the injection molding process and included two separate sections that are molded and glued together. This is a time consuming and expensive process that the customer wanted to avoid due to low volume requirements and occasional design revisions.

FDM technology offered the opportunity to manufacture the profusion tray in low volume at an acceptable cost with the flexibility to make design changes when needed. The current profusion tray design could not be built without supports generated inside the hollow coolant chamber.

### Real Solution

The solution was to work with the original 3D CAD files and revise the geometry so that the part would build without interior support. The engineers shared files with the Applications Engineering team at Stratasys, creating a workable one-part design. This new optimized design utilized interior angles that would allow the coolant chambers of the part to be built using "self-supporting" angles (figure 2).

In order to build without support, these top surfaces had to be changed so that no interior angle in the chamber would be greater than 45 degrees from the vertical. The 3D CAD file was revised to include this new angled geometry and a STL file was generated.

### Real Results

Through an optimized design, this medical device company was able to produce an FDM part without internal supports (figure 3).

FDM technology provided the company the opportunity to manufacture the profusion tray in low volume quantities at an acceptable cost with the flexibility to make design changes when needed. The end result is a functional product manufactured in one piece on a Fortus system from PPSF material.

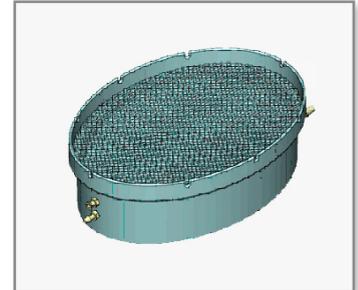


Figure 1: Profusion tray.

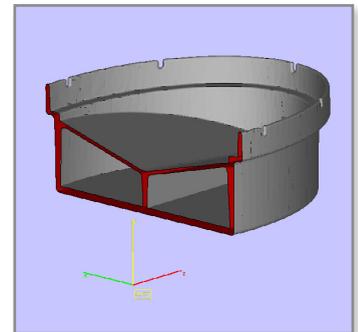


Figure 2: Self-supporting angles.

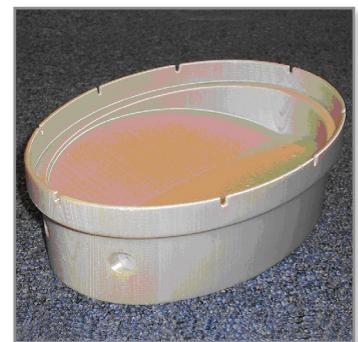


Figure 3: The "optimized design" profusion tray

**Stratasys** | [www.stratasys.com](http://www.stratasys.com) | [info@stratasys.com](mailto:info@stratasys.com)

7665 Commerce Way  
Eden Prairie, MN 55344

+1 888 480 3548 (US Toll Free)

+1 952 937 3000 (Intl)

+1 952 937 0070 (Fax)

2 Holtzman St.

Science Park, PO Box 2496

Rehovot 76124, Israel

+972 74 745-4000

+972 74 745-5000 (Fax)

#### ISO 9001:2008 Certified

© 2009, 2014Stratasys Inc. All rights reserved. Stratasys, FDM and Fortus are registered trademarks and Fused Deposition Modeling, FDM Technology, Fortus 250mc, Fortus 360mc, Fortus 400mc, Fortus 900mc, Insight and Control Center are trademarks of Stratasys Inc., registered in the United States and other countries. ULTEM 9085 is a trademark of SABIC Innovative Plastics IP BV. All other trademarks are the property of their respective owners. Product specifications subject to change without notice. SSYS-BP-OptimizingDesignsforDDM-03-14.

For more information about Stratasys systems, materials and applications, contact Stratasys Application Engineering at 1-855-693-0073 (toll free), +1 952-294-3888 (local/international) or [ApplicationSupport@Stratasys.com](mailto:ApplicationSupport@Stratasys.com).

